

THIS DRAWING & DESIGN IS THE PROPERTY OF INTERTECH TECHNOLOGIES PVT LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING.

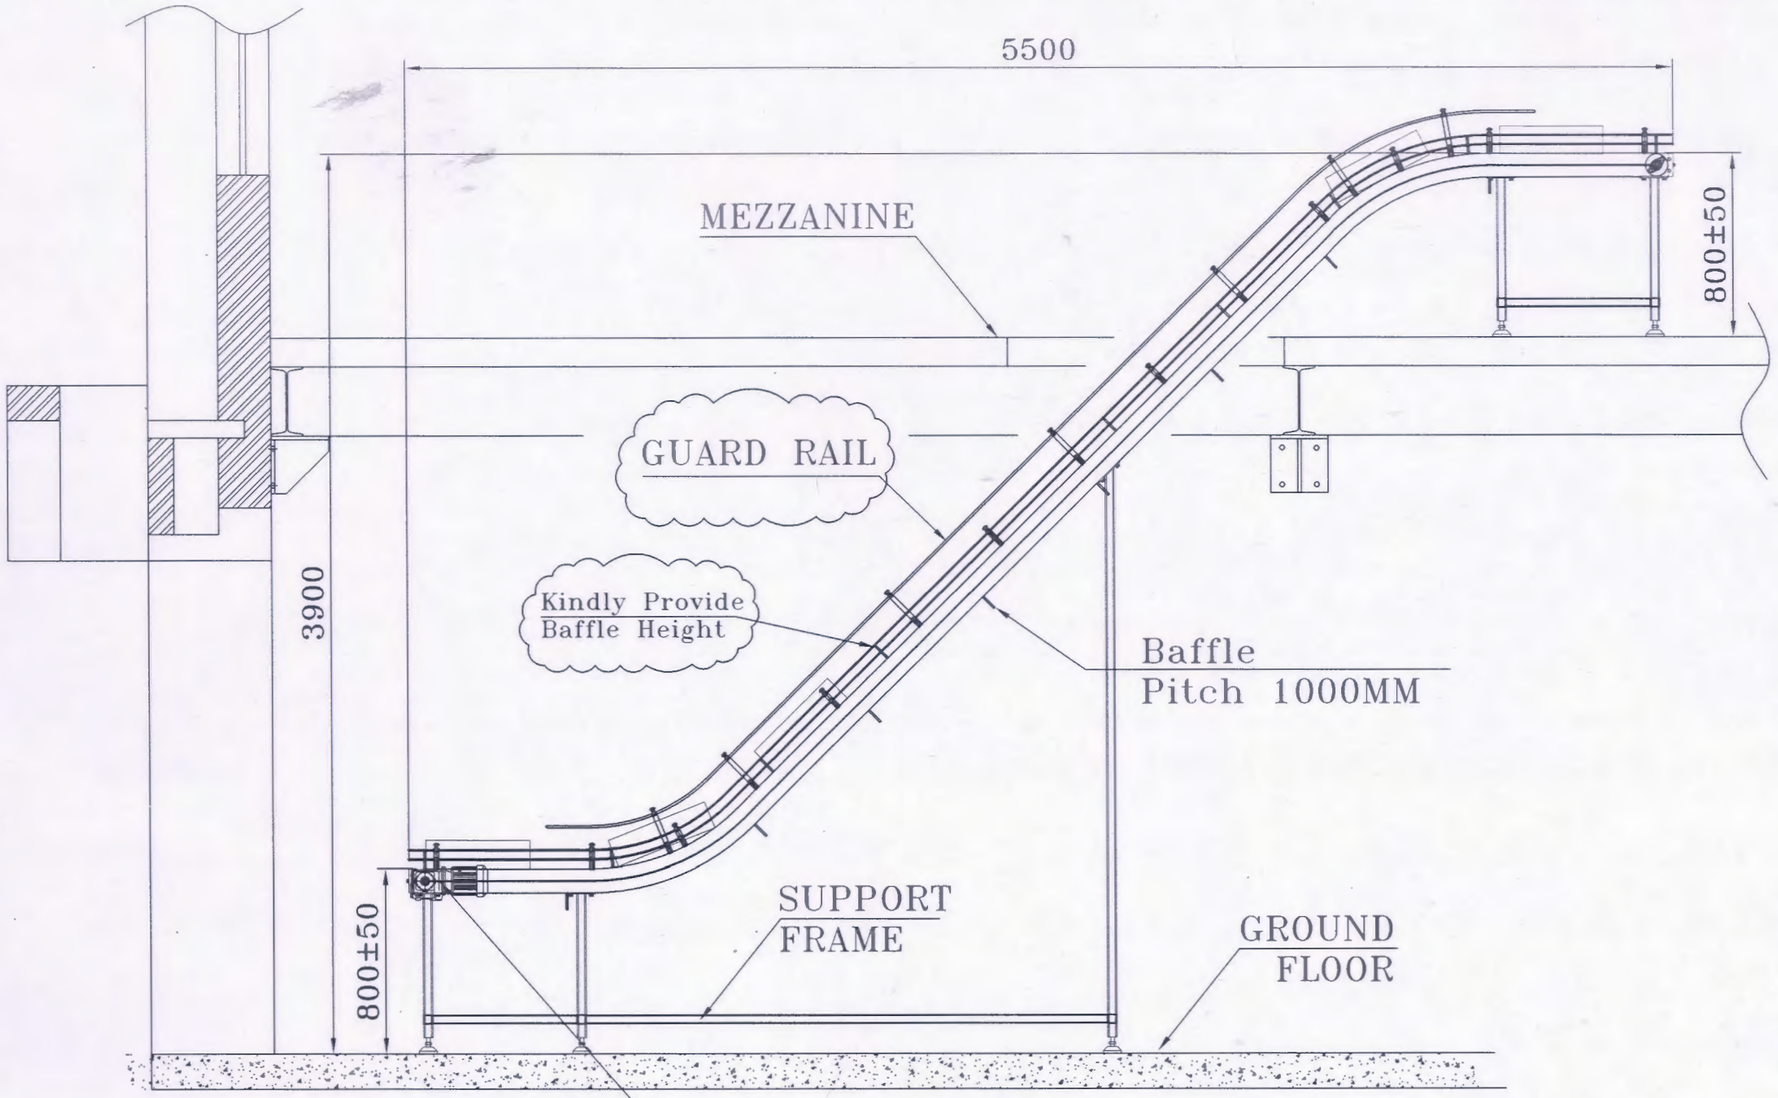

ELEVATION

POWER SOURCE:–3 PHASE, AC 415V, 50Hz
MOTOR OUTPUT:1.1kw (Tongyu Brand)
GEAR BOX :1:40

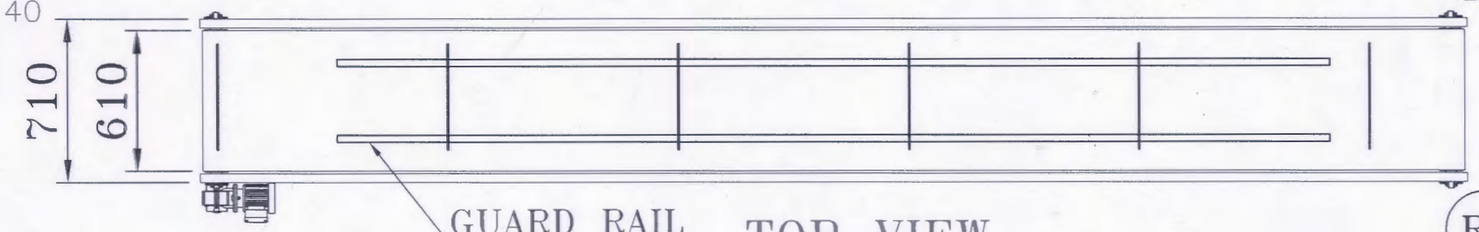

TOP VIEW

APPROVED DRAWING
S. Agarde 23/05/20

Z–TYPE CLEATED BELT CONVEYOR–3 MAIN SPECIFICATION

MACHINE LENGTH:– 4700MM
BELT WIDTH:– 610 MM
CONVEYOR WIDTH:710mm
MACHINE HEIGHT:–800 (±50MM)
BELT SPEED:Adjustable Speed **Max. 20Mtr/Min**
POWER SOURCE:–3 PHASE, AC 415V, 50Hz
MOTOR OUTPUT:1.1kw (Tongyu Brand)
GEAR BOX :1:40
BELT:Modular Belt
Support Stand : 60 x 30 SS 304
MACHINE SIDE PLATE BOARD:– SS 304 x 3 Thk.
QTY:–1 No.

R1
R1

DRN.		Z-TYPE CLEATED BELT CONVEYOR-3	QTY.	1
CHD.			SIZE	A3
DATE			SHEET	1 OF 1
SCALE	NTS	DRG. NO. :– JINQ–INT–ZTCBC3–07042017–9–R1	REV.	R1

CLIENT :– M/s.
PROJECT :– PACKING ROLL CONVEYING SYSTEM
ALL DIMENSION ARE IN MM, UNTIL & UNLESS SPECIFIED